



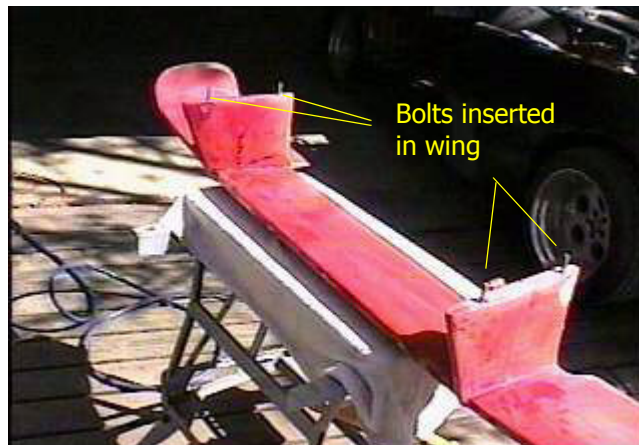

The wing comes as a single piece. Some builders elect to cut the flap out and make it moveable.

To fasten the wing to the trunk, it is necessary to install bolts in the bottom of the wing. Once inserted, the holes are filled with glass mat and resin to make sure the bolts are securely anchored.

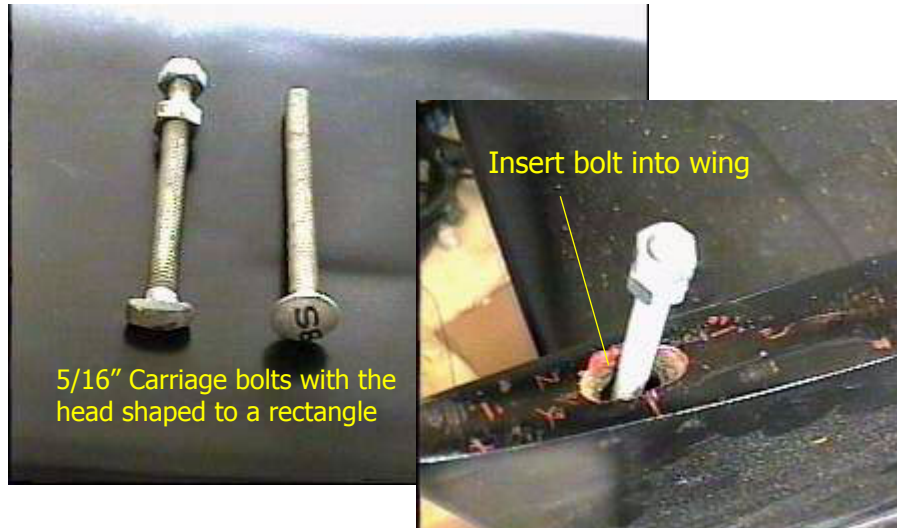

Once the bolts are securely fastened in the wing, drill holes through the metal braces that are part of the trunk hinge.



FIGURE 135. Wing bolt connections to trunk

Wing removed

There may be times when you wish to not have the wing mounted. Simply remove the wing by unbolting it from the trunk lid. To fill in the holes, you can take four 1/2" carriage bolts and grind the tops smooth.

Paint them to match the body color and this will allow you to fill in the holes and give a finished appearance to the trunk.



FIGURE 136. Trunk lid without wing
